

Request Form - Belt Conveyor

Customer Information

Date:

Company:

Contact person:

Telephone number:

E-Mail address:

Quotation needed by:

Belt Conveyor

Number of conveyors [pcs]:

Frame width [mm]:

☐ 40mm ☐ 80mm ☐ 120mm ☐ 160mm ☐ 200mm ☐ 240mm ☐ 300mm ☐ 400mm ☐ 500mm ☐ 600mm
☐ 700mm ☐ 800mm ☐ 1000mm ☐ 1200mm Custom Width: _____

Total length [mm]:

Speed [m/min]: ☐ Constant: _____ ☐ Adjustable from: _____ to _____

Speed controller: ☐ Yes (wired, cable length 10ft) ☐ No

Total load / conveyor [kg]:


Side Guides:

Yes No


Height [mm]: _____

Height [mm]: _____ Width [mm]: _____

Fixed ☐

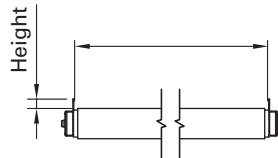

Adjustable ☐

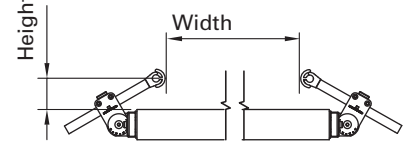

Product dimensions [mm]: Length: _____ Width: _____ Height: _____

Product weight [kg]:

Product material:

Product temperature [°C]:

Ambient temperature [°C]:

Drive and Idler

Standard voltage: ☐ Δ 208-230V / Y 460V, 60Hz

Other voltage: ☐ 24V BLDC ☐ Special Voltage:


☐ Drum motor

☐ Indexing operation Cycles/min: _____ Travel time [s]: _____ Distance [mm]: _____

☐ Accumulating Accumulated load [kg]: _____

Transport direction: ☐ Pulling ☐ Pushing ☐ Reversing

Drive type: _____



Detailed description in our Robotunits catalogue, section Conveyor Technology.

Belt properties:


☐ Adhesive ☐ Accumulating ☐ Cut-resistant ☐ Food-safe ☐ Electrically conductive
☐ UV-resistant ☐ Chemical-resistant ☐ Oil-resistant ☐ Other:

Cleats: ☐ Height [mm]: _____ Pitch [mm]: _____


Request Form - Belt Conveyor

Motor and Terminal Box

Motor position:

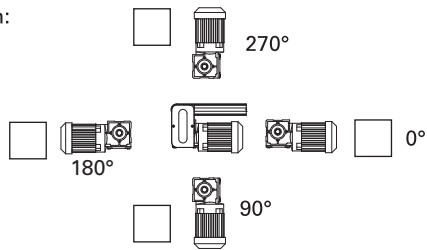

Terminal box position:

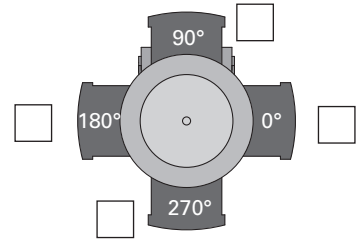

☐ Thermal contact:

☐ Thermal sensor:

Support Frame


☐ Yes (assembled)

☐ Yes (supplied in kit form)



Start height [mm]: _____

End height [mm]: _____


Incline

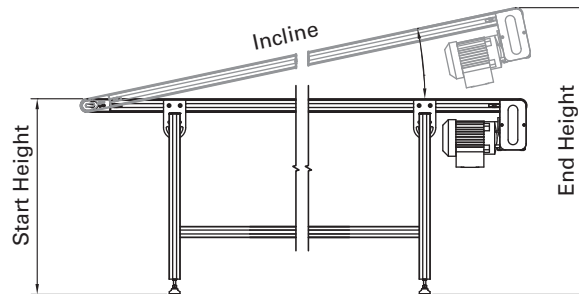

Foot type:



Floor mounting bracket:



Information / Sketch