

Request Form - Belt Conveyor

Customer Information

Date:

Company:

Contact person:

Telephone number:

E-Mail address:

Quotation needed by:

Belt Conveyor

Number of conveyors [pcs]:

Frame width [mm]:

☐ 40mm ☐ 80mm ☐ 120mm ☐ 160mm ☐ 200mm ☐ 240mm ☐ 300mm ☐ 400mm ☐ 500mm ☐ 600mm
☐ 700mm ☐ 800mm ☐ 1000mm ☐ 1200mm ☐ Custom Width: _____

Total length [mm]:

Speed [m/min]: ☐ Constant: _____ ☐ Adjustable from: _____ to _____

Speed controller: ☐ Yes (wired, cable length 10ft) ☐ No

Total load / conveyor [kg]:


Side Guides:

☐ Yes ☐ No


Height [mm]: _____

Height [mm]: _____ Width [mm]: _____

Fixed



Adjustable

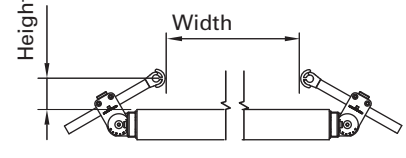

Product dimensions [mm]:

Length: _____

Width: _____

Height: _____

Product weight [kg]:

Product material:

Product temperature [°C]:

Ambient temperature [°C]:

Drive and Idler

Standard voltage: ☐ Δ 208-230V / Y 460V, 60Hz

Other voltage: ☐ 24V BLDC ☐ Special Voltage:

☐ Drum motor

☐ Indexing operation

Cycles/min: _____

Travel time [s]: _____

Distance [mm]: _____

☐ Accumulating

Accumulated load [kg]: _____

Transport direction:

☐ Pulling

☐ Pushing

☐ Reversing

Drive type: _____



Detailed description in our Robotunits catalogue, section Conveyor Technology.

Belt properties:

☐ Adhesive

☐ Accumulating

☐ Cut-resistant

☐ Food-safe

☐ Electrically conductive

☐ UV-resistant

☐ Chemical-resistant

☐ Oil-resistant


☐ Other:

Cleats: ☐ Height [mm]: _____ Pitch [mm]: _____


Request Form - Belt Conveyor

Motor and Terminal Box

Motor position:

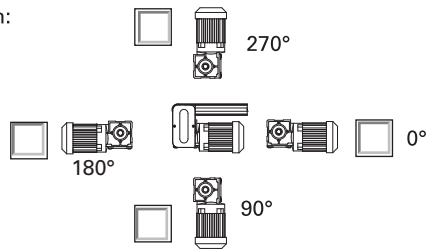

Terminal box position:

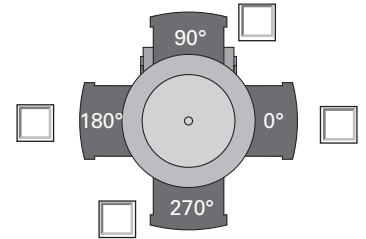☐

Thermal contact:

☐

Thermal sensor:

Support Frame

☐

Yes (assembled)


☐

Yes (supplied in kit form)


Start height [mm]: _____

End height [mm]: _____


Incline

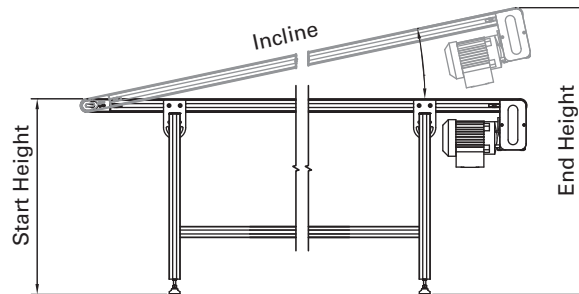

Foot type:

☐☐

Floor mounting bracket:

☐

Information / Sketch

Clear Form