
Request Form - Powered Roller Conveyor

Customer Information	
Date:	
Company:	
Contact person:	
Telephone number:	
E-Mail address:	
Quotation needed by:	
Transported Goods	
Length [mm]:	
Width [mm]: 400 600	Custom width:
Height [mm]:	
Weight [kg]:	
Material:	
Floor conditions:	
Temperature [°C]:	
Ambient temperature [°C]:	
Dallas Cassassas	
Roller Conveyor	
Number of roller conveyors [pcs]:	
Number of zones [pcs.]:	
Inside width [mm] = Material width + 10	
Frame width [mm] = Inside width + 80	
Straight design	Curved design
Length [mm] = Material length x Number of zones	Curve angle: 45° 90° 135° 180°
Without side guides With side guides	Side guide left Side guide right
Power supply 120V: Yes	N ₂
Power supply 120V: Yes Cable length [m]:	No No
Cable length [m].	
Control Protocol and Logic	
Speed [m/min]:	
Pre-installed ZPA (not possible with EtherCAT)	No
Modbus/TCP EtherNet/IP	No
Profinet IO EtherCAT	<u> </u>
Start sensor:	Yes No
Transfer at end (ext. signal):	Yes No



Request Form - Powered Roller Conveyor

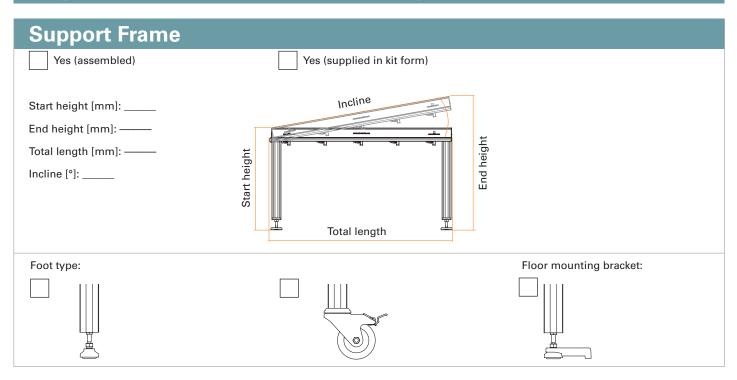

Information / Sketch	

