

Request Form - Powered Roller Conveyor

Customer information


Date:	Quotation needed by:
Company:	Contact person:
Phone number:	E-mail address:

Conveyed material

Length [mm]:	☐ 300 ☐ 400 ☐ 600 ☐ _____	Width [mm]:	☐ 300 ☐ 400 ☐ 600 ☐ _____
Height [mm]:		Weight [kg]:	
Conveyed material type:	☐ plastic boxes ☐ cardboard boxes ☐ _____		
Conveyed material bottom surface:	☐ smooth ☐ ribbed		
Temperature [°C]:		Ambient temperature [°C]:	


Straight Powered Roller Conveyor

Number of Powered Roller Conveyors [pcs.]:	Length [mm]:
Inside width [mm] = product width + 10 mm:	Frame width [mm] = inside width + 80 mm:
Number of zones [pcs.]:	Transfer Unit 90° in zone: Number of transfer lanes:
☐ Power supply	Cable length [m]:

Conveying direction: ☐  ☐ 


Aligning Powered Roller Conveyor

Number of Powered Roller Conveyors [pcs.]:	Length [mm]:
Inside width [mm]:	Frame width [mm] = inside width + 80 mm:
☐ Power supply	Cable length [m]:

Conveying direction: ☐  ☐ 

Curved Powered Roller Conveyor

Number of Powered Roller Conveyors [pcs.]:	Curve angle: ☐ 45° ☐ 90°
Inside width [mm]:	Frame width [mm] = inside width + 80 mm:
☐ Power supply	Cable length [m]:

Conveying direction: ☐  ☐ 

Request Form - Powered Roller Conveyor

Control and logic

Speed [m/min]:

Network controller

- ☐ Pre-installed accumulation logic (not possible with EtherCAT)
☐ Modbus TCP (ConveyLinx) ☐ EtherNet/IP (ConveyLinx) ☐ CC-Link (ConveyLinx)
☐ Profinet (ConveyLinx) ☐ EtherCAT (MotionLinx)

Motor control

(without logic, without sensor)

- ☐ Digital I/O (Eqube)

Start: ☐ Manually ☐ Sensor ☐ Button ☐ Selector switch ☐ External control¹

Stop: Zone _____ ☐ Button ☐ Selector switch ☐ External control¹

Outfeed: ☐ Manually ☐ Button ☐ Selector switch ☐ External control¹



¹ Additional signal from the zone sensor as output signal

Side Guide


Side Guide:

Height [mm]:


Inside width [mm]:

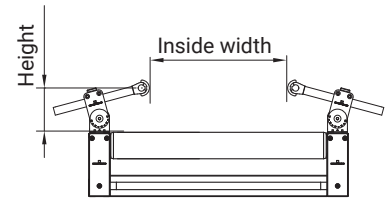


☐ without side guide



☐ with side guide



☐ rigid side guide



☐ flexible side guide

Stand


☐ assembled

☐ sent as kit



Start height [mm]:

End height [mm]:

Inclination [°]:

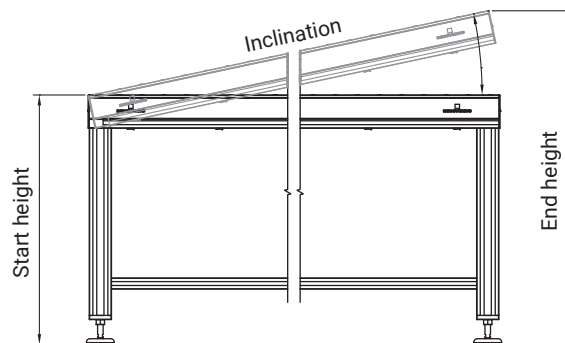

Foot type:



Notes / Layout

Reset form